

25X1

CABLE
COLINRAD

21 September 1959

(IN TRIPLICATE)

SECRET

DOC <u>22</u>	REV DATE <u>29 APR 1960</u>	BY <u>018323</u>
ORIG COMP <u>35</u>	OPI <u>56</u>	TYPE <u>01</u>
ORIG CLASS <u>5</u>	PAGES <u>32</u>	REV CLASS <u>C</u>
JUST <u>22</u>	NEXT REV <u>2010</u>	AUTH: HB 70-4

25X1

Subject: Contract No. 605
Task Order No. 4
Receiving Dish Antenna
Final Engineering Report
Submission of

Enclosure: (A) Final Engineering Report on
Receiving Dish Antenna for the
600 to 6000 MC Range, thirteen (13) copies

Gentlemen:

Pursuant to the terms and provisions of the subject contract, the contractor submits Enclosure (A), described above, fulfilling the requirement for submission of a final engineering report. Due to the fact the subject contract does not set forth an applicable shipping address, the final report is transmitted to your attention with the understanding that the report will be forwarded to the applicable parties.

Very truly yours,

2 cy Logistics
1 CC-E lab
2 vital files
2 project file (contract)
1 project file
1 R+D lab

25X1

25X1

Contract Administrator
NKG:js

SECRET

CONFIDENTIAL

THIS DOCUMENT CONTAINS INFORMATION AFFECT-
ING THE NATIONAL DEFENSE OF THE UNITED STATES
WITHIN THE MEANING OF THE ESPIONAGE LAWS,
TITLE 18, U. S. C., SECTIONS 793 AND 794. ITS
TRANSMISSION OR THE REVELATION OF ITS CON-
TENTS IN ANY MANNER TO AN UNAUTHORIZED
PERSON IS PROHIBITED BY LAW.

REPORT NO. 1062

CONFIDENTIAL

FINAL ENGINEERING REPORT
ON
RECEIVING DISH ANTENNA
FOR THE 600 TO 6000 MC RANGE

CONFIDENTIAL

CONFIDENTIAL

Report No. 1062

FINAL ENGINEERING REPORT
ON
RECEIVING DISH ANTENNA
FOR THE 600 TO 6000 MC RANGE

1 September 1959

CONFIDENTIAL

ABSTRACT

This is a final report describing the design and development of a receiving-type, high-gain transportable antenna for the 600 to 6000 mc frequency range. The antenna consists of a 4-foot "breakdown type" parabolic reflector fed with a log periodic feed. The contents of the instruction book for this antenna which gives a parts list, assembly instructions and electrical performance data is included as appendix I of this report.

RECEIVING DISH ANTENNA
FOR THE 600 TO 6000 MC RANGE

1. INTRODUCTION

This antenna was designed and fabricated to meet the requirements for a receiving-type, high-gain transportable antenna to cover the 600 - 6000 mc range.

Following is a summary of the desired electrical and mechanical specifications of this antenna.

Electrical requirements:

- (1) The gain of the antenna should be approximately 15 db/dipole at 600 mc and 34 db/dipole at 6000 mc.
- (2) The side-lobe level should be 10 db or more below the magnitude of the main beam.
- (3) The antenna should be matched to an unbalanced 50-ohm transmission line with a VSWR no greater than 3:1 in the line.
- (4) It should be possible to select readily either vertical or horizontal polarization.

Mechanical requirements:

- (1) In order to facilitate transportability, the construction should be such that the antenna could be readily assembled, disassembled and packed in several small boxes.
- (2) The assembled antenna should fit into a certain confined volume.
- (3) An azimuth indicator should be provided, but no elevation adjustment was required.
- (4) The antenna was not to be weatherized for outside use.

2. THE 600 - 6000 MC ANTENNA

Following is a brief description of the antenna which was designed and fabricated to meet the above requirements.

A 4-foot parabolic reflector having an f/d ratio of .5 was used in conjunction with a log periodic primary feed. A detailed discussion of the feed will be given later.

To be able to pack the reflector in a relatively small container, it was necessary to use a "breakdown type" construction. A 4-foot spun-aluminum reflector was cut into 9 parts consisting of a spun-aluminum center and 8 identical outer segments, as shown in figures 1 and 2 (appendix I). These 9 parts are held together by the mounting ring assembly and dish support arms. When the dish has been properly assembled, the deviation in the parabolic contour is less than $\pm 1/8$ inch, which is approximately $1/16$ wavelength at the highest operating frequency of 6000 mc.

The mounting ring assembly is attached to a vertical mast with two clamps. These clamps also permit the reflector to turn about the vertical mast for an azimuth adjustment of 360 degrees. The height of the center of the reflector can be adjusted from approximately 2 to 6 feet by sliding the clamps up and down the vertical mast. A collapsible quadripod assembly rigidly supports the vertical mast.

Four bakelite feed supports and an aluminum spider assembly holds the log periodic primary feed pyramid in front of the reflector (figure 1).

The transmission line furnished with each antenna consists of a 30-foot length of Prodelin Incorporated Spiroline, 3/8-inch, 50-ohm, polyethylene-jacketed coax cable (military number RG-260/U) having an attenuation of approximately 8 db/100 foot at 6000 mc. This coax cable is attached to the feed pyramid as shown in figure 11 (appendix I).

The disassembled antenna is shown in 3 aluminum boxes in figure 3 (appendix I).

3. PRIMARY FEED DESIGN

Prior to the beginning of this project the practicability of a new concept in extremely broadband antennas known as the logarithmically periodic antenna structure had been established. The general pattern and impedance characteristics of various antenna configurations utilizing the log periodic principle, such as linearly polarized omnidirectional, bidirectional and unidirectional structures; circularly polarized bidirectional and unidirectional structures; and unidirectional linearly polarized high gain arrays had been investigated.^{1, 2, 3, 4} From this general investigation and from a later more extensive investigation to optimize the design parameters of the wire, linearly polarized, unidirectional

structure, it became apparent that some of these unidirectional structures had the necessary pattern characteristics to make excellent primary feeds for reflector or lens type antennas.

To design a primary feed for a reflector, it is necessary to know the phase center location and behavior with frequency and the amount of aperture blocking caused by the feed as well as the usual pattern and impedance characteristics.

In the course of this and another similar project, a general investigation was performed to gain a knowledge of the above-mentioned characteristics as a function of the design parameters of trapezoidal-tooth, sheet, log periodic structures. The results of this investigation were given in a previous report. Included in that report are curves of beamwidth, impedance, and phase center location of the sheet, log periodic structure as a function of the design parameters α, ψ, β , and τ . Also given over a 600 to 6,000 mc range are the radiation patterns, gain, beamwidth, and impedance of a 4-foot dish antenna utilizing a log periodic primary feed having design parameters $\alpha = 60^\circ, \psi = 45^\circ, \beta = 10^\circ$ and $\tau = .707$.

The sheet-type structure was used in the investigations and for the final feed design because a higher degree of accuracy in the modeling techniques could be achieved. All the structures were chemical milled from 1/32-inch thick brass sheet.

The final design of the log periodic primary feed for the 4-foot reflector consisted of a basic log periodic structure (design parameters $\alpha = 60^\circ, \psi = 45^\circ, \beta = 10^\circ$ and $\tau = .707$) lock foamed in an epoxy-impregnated fiberglass, pyramidal shell having base dimensions of 11 by 7-3/4 inches and a height of 10-1/2 inches. To get a conventional unbalanced 50-ohm input to the feed, the approximately 160-ohm, balanced, average input impedance of the log periodic structure was transformed to an unbalanced 50 ohms by the use of a tapered line balun.

The broken curve in figure 6 (appendix I) shows the free space input VSWR of the log periodic primary feed as a function of frequency over its operating range of 600 to 6,000 mc. As can be seen, the input VSWR is less than 2:1 over more than 50% of the frequency range and has a maximum value of 2.7 to 1 at 5,400 mc.

4. FINAL ANTENNA PERFORMANCE

Test data taken on the antenna is summarized and presented in figures 4 through 9 (appendix I). Figure 4 is a plot of E- and H-plane beamwidths as a function of frequency. The E-plane beamwidth varies from approximately 23 degrees at 600 mc to 3 degrees at 6,000 mc while the H-plane beamwidth varies from approximately 23.5 degrees to 3 degrees over the same frequency range.

Figure 5 compares the measured gain of the antenna with the theoretical maximum gain of a uniformly illuminated aperture. The gain measurements were made by comparing the gain of the system with standard gain electromagnetic horns. It was not feasible to measure the gain of the system from 600 to 1,000 mc because no standard gain antennas were available. As can be seen from the figure, the actual gain is less than the theoretical by about 2 db on an average which results in an approximate, practical realizable gain factor of 0.6^5 . The solid curve of figure 9 is a plot of the input VSWR as a function of frequency for the 4-foot antenna. The VSWR is less than 3 to 1 except at three very narrow points where the maximum VSWR is 3.4 to 1.

Figures 7 through 9 are representative log plot E- and H-plane patterns of the 4-foot antenna. At 600 mc, the side-lobe level is a maximum of approximately -10 db.

5. CONCLUSION

The design of this high-gain, transportable antenna system satisfies the desired specification requirements with the following exception: The maximum input VSWR is greater than 3:1 in 3 very narrow frequency bands, as pointed out in a previous section.

It is felt that the design of this antenna, which included a general investigation of the log periodic structure as a primary feed, has extended the state-of-the-art in the design of extremely broadband reflector-type antennas as well as proved the feasibility of constructing such an antenna so that it is readily transportable.

6. REFERENCES

1. R. H. DuHamel and D. E. Isbell, "Broadband Logarithmically Periodic Antenna Structures", 1957 IRE National Convention Record, Part I, pp. 119-128.
2. D. E. Isbell, "Non-Planar Logarithmically Periodic Antenna Structures", University of Illinois, Antenna Laboratory TR #30, February 20, 1958 Contract AF 33(616)-3220.
3. R. H. DuHamel and F. R. Ore, "Logarithmically Periodic Antenna Designs", 1958 IRE Convention Record, Part I, pp. 139-151.
4. R. H. DuHamel and D. G. Berry, "Logarithmically Periodic Antenna Arrays", 1958 IRE Wescon Convention Record, Part I, pp. 161-174.
5. S. Silver, "Microwave Antenna Theory and Design", Radiation Laboratory Series #2, McGraw-Hill, 1949, page 415-433.

INSTRUCTION BOOK

RECEIVING DISH ANTENNA

600 TO 6000 MC

**523 0014 00
15 JUNE 1959**

PRINTED IN THE UNITED STATES OF AMERICA

1.1 GENERAL.

The Receiving Dish Antenna shown in figures 1 and 2 is a lightweight, quickly erected, high gain antenna in the 600- to 6000-mc frequency range. It is directional and can be either vertically or horizontally polarized as desired.

The antenna structure consists of three main subassemblies.

- a. the base assembly, which consists of the portable folding base section and support mast;
- b. the dish assembly, consisting of a center dish section and eight dish support arms;
- c. and the feed support assembly, consisting of the four support legs, spider, and logarithmic periodic feed pyramid.

The electrical characteristics of the antenna are shown in the charts included. These show the beamwidth of the antenna as a function of frequency (figure 4), the gain in db over a reference dipole (figure 5), the vswr as a function of frequency (figure 6), and the radiation patterns of the antenna (figures 7, 8, and 9).

2.1 ASSEMBLY INSTRUCTIONS.

Refer to figure 11, the assembly drawing of the antenna, and to figure 10, a simple exploded view of the antenna, as an aid to assembly.

- a. Unfold the base and tighten sockethead screws.
- b. Stack the four mast sections onto the base.
- c. Attach cable extension to the end of the cable assembly.
- d. Fasten the end plate, washer, and 1/2 x 13 hex nut to the cable extension.

Receiving Dish Antenna
600 to 6000 Mc



Figure 1. Receiving Dish Antenna, Front View

Receiving Dish Antenna
600 to 6000 Mc

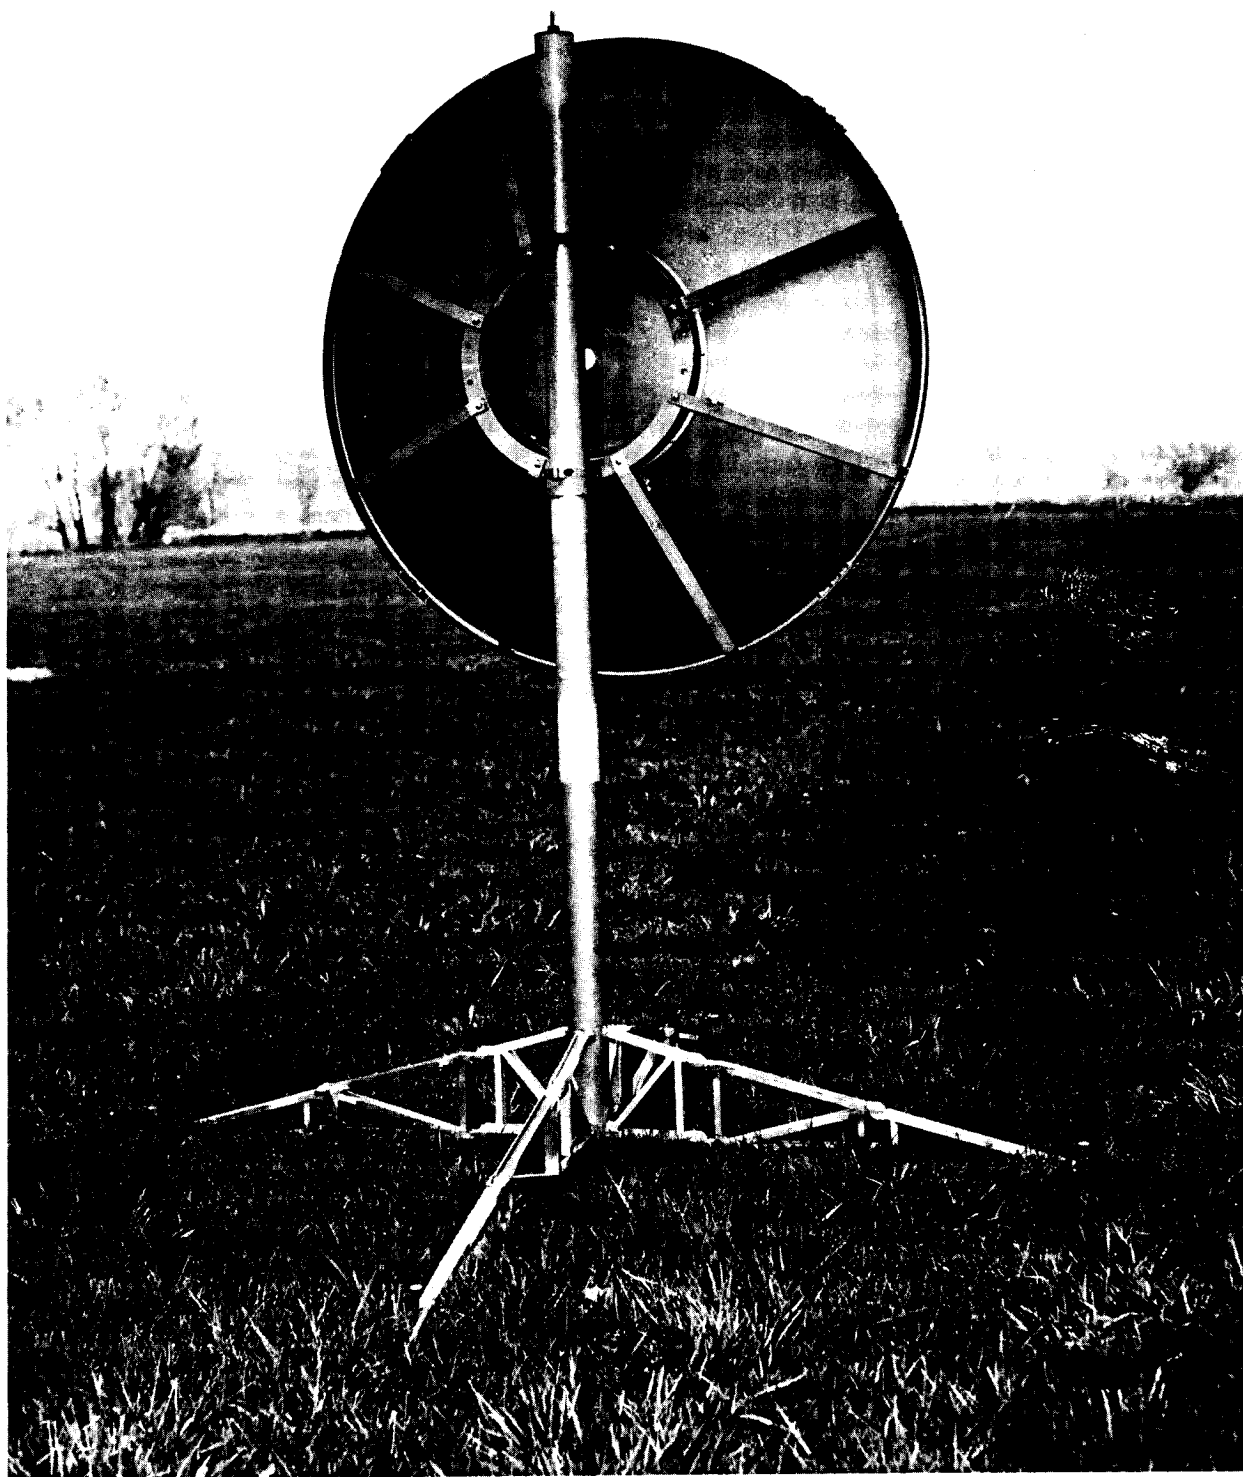


Figure 2. Receiving Dish Antenna, Rear View

Receiving Dish Antenna
600 to 6000 Mc

- e. Thread the cable from top to bottom of the stacked mast sections.
- f. Attach cable pin to the bottom of the cable after cable is threaded down mast.
- g. Tighten hex nut on cable end plate until mast reaches desired tension.
- h. Attach engraved azimuth ring to mast.

2.2 DISH ASSEMBLY.

- a. Place spacer rod on flat surface with small end up.
- b. Turn center dish over spacer, concave side down.
- c. Attach the eight dish segments to the center dish section with 10-32 x 1/2 flat head screws and 10-32 captive nuts.
- d. Lay the mounting ring on the center dish section with the flat side up.
- e. Attach the eight dish support arms to the dish sections, using 10-32 x 1/2 flat head screws on the dish center, and 10-32 x 1/2 round head screws on the dish rim.
- f. Fasten the eight dish support arms to the center ring using 10-32 x 1/2 round head screws, washers, and 10-32 hex nuts.

2.3 FEED SUPPORT ASSEMBLY.

- a. Assemble spider and four feed support tubes.
- b. Mount the feed support assembly to the dish with support legs attached 45 degrees from center line of mast clamps. Use one 1/4 x 20 x 5/8 bolt per support leg at this time to attach support legs to dish rim.
- c. Mount the logarithmic periodic feed pyramid.

CAUTION

Fiberglas case on feed pyramid is fragile; handle with care.

- d. Adjust the support legs as necessary to insure 22-13/16 inches spacing from the point of the feed pyramid to the center of the dish, keeping all legs equal length to insure proper alignment of the feed pyramid.
- e. Attach and tighten the remainder of the 1/4 x 20 x 5/8 bolts to the support legs and a 1/4-inch lock washer, and 1/4 x 20 hex nut.
- f. Secure the feed pyramid to the spider, noting the instructions stenciled on the feed. Turn either for vertical or horizontal polarization as desired.
- g. Slide the dish onto mast and tighten mast rings.
- h. Connect the right angle fitting of the short coaxial jumper to the pyramid feed point.
- i. Connect the 30-ft piece of semiflexible coaxial feed line to the other end of the short coaxial jumper and clip the semiflexible feed line to a lower support leg with two clamps.

CAUTION

Do not kink or sharply bend the semiflexible coaxial line. Be extremely careful in shaping this line to avoid damage. Minimum bend radius is six inches.

3.1 MAINTENANCE AND PACKING.

Since aluminum is the basic structural material, the antenna needs no routine maintenance beyond normal concern for wear of parts; however, care should be exercised in handling.

The antenna can be transported in three metal boxes which are packed as shown in figure 3.

NUMBER	BOX	MFR'S SKETCH NO.
	Box 1	
1	Mounting ring assy.	no number
1	Spacer rod	4046 B 208
4	Mast sections	4046 B 120
8	Dish support arms	4046 B 102
1	Center dish	4046 E 198
8	Dish segments	4046 E 196
	Box 2	
1	Base assembly	no number
1	Index ring	no number
1	Mast cable assy.	4046 B 125
1	Cable pin	4046 B 126
1	End plate	4046 B 123
1	Cable extension	4046 B 124
1	Nut, 1/2-13	313 1028 00
1	1/2 in flat washer	310 0485 00
1	Tool kit	4046 A 212
	Box 3	
1	Cable Assy.	4046 A 209
1	Coaxial line spool	4020 A 92
1	Coaxial line jumper assy.	4046 A 207
2	Coaxial line clamps	4046 B 211
1	Logarithmic periodic feed pyramid	4020 D 352
1	Spider	4046 A 200
1	Nut, 5/16 - 18	313 0033 00
8	Feed leg	4046 B 186
4	Feed support base	4046 C 176
4	Nut, 1/2 - 13	313 1028 00
4	Washer 1/2 flat.	no number
1	Packaged hardware	no number

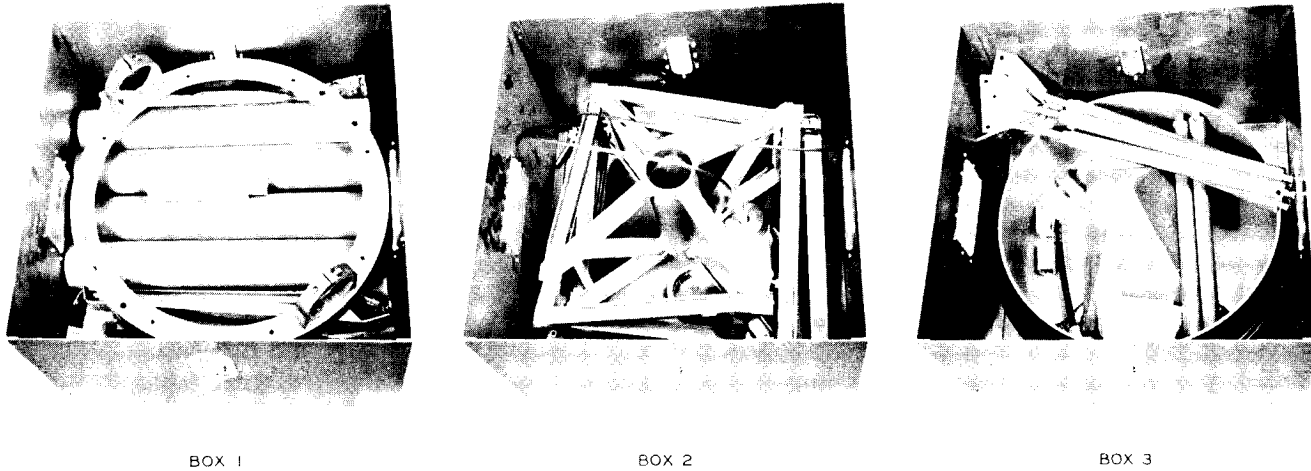


Figure 3. Antenna Packed in Transportable Metal Boxes

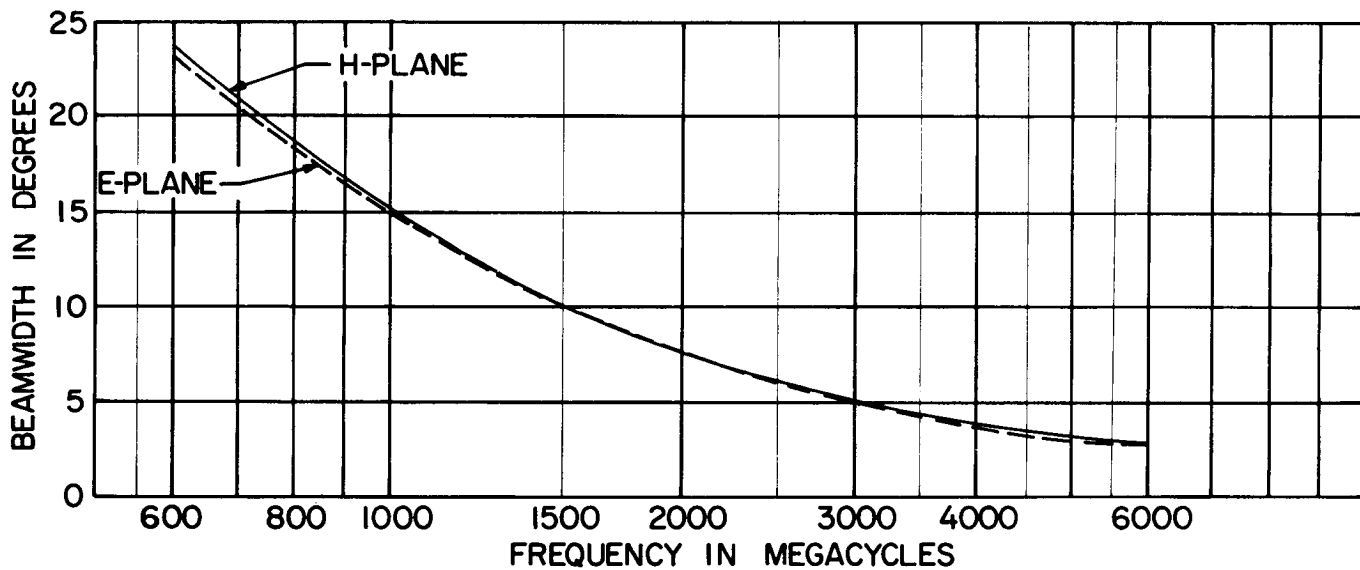


Figure 4. Beamwidth of Antenna as a Function of Frequency

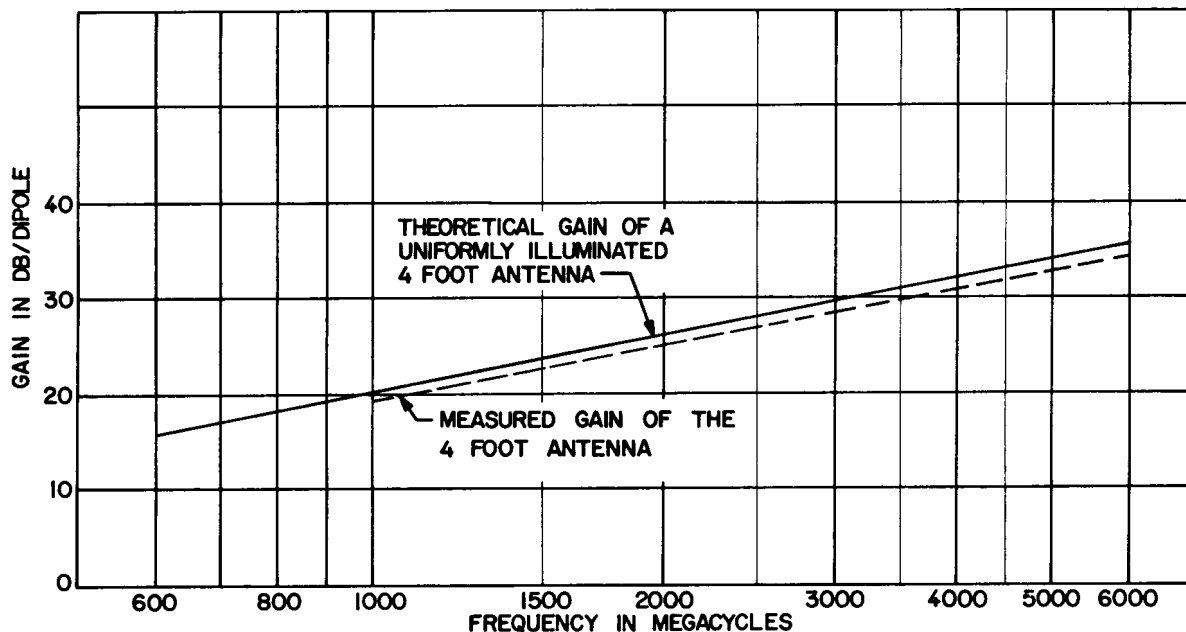


Figure 5. Gain in Db over a Dipole as a Function of Frequency

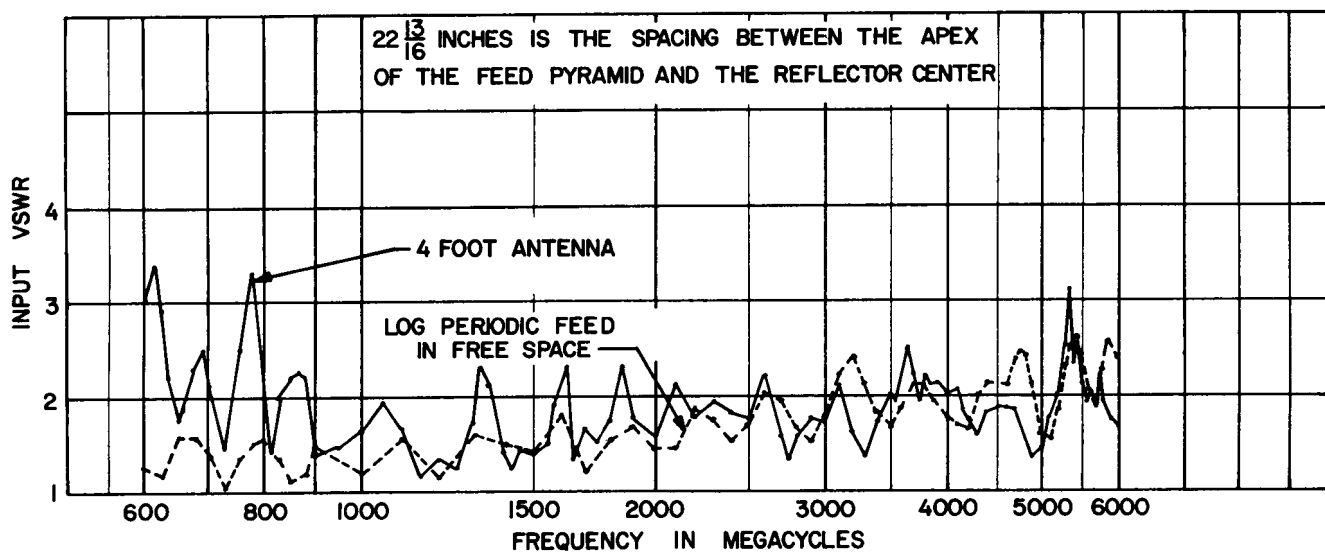


Figure 6. Vswr as a Function of Frequency

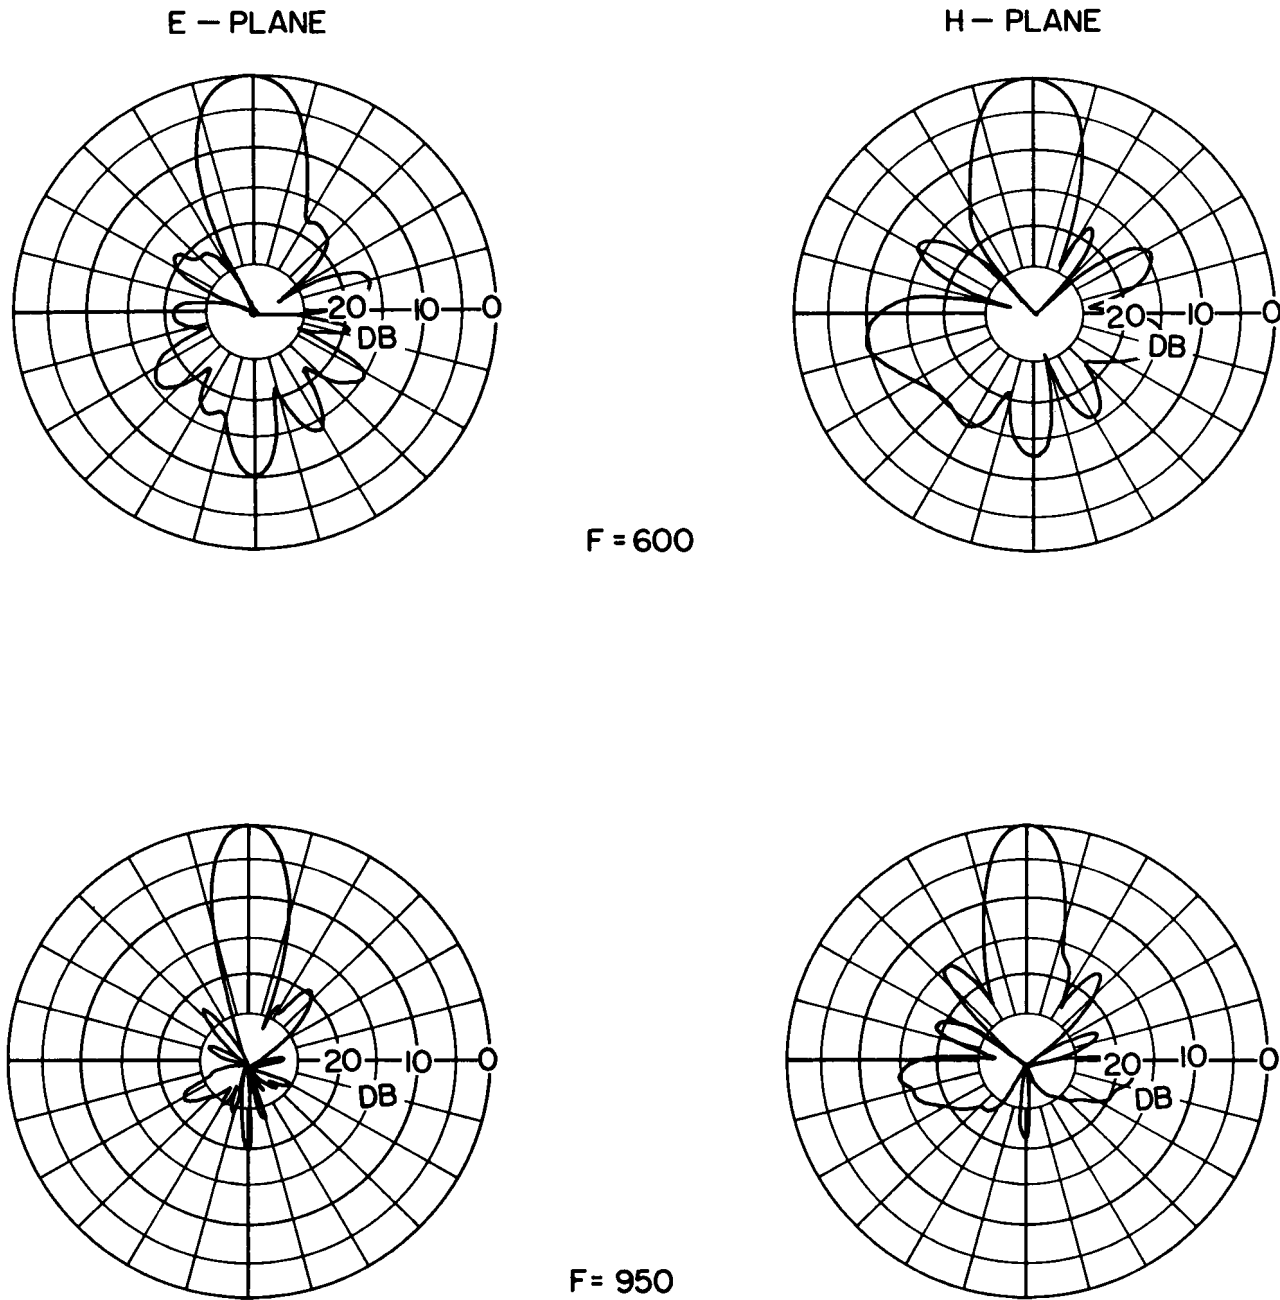


Figure 7. Radiation Patterns, 600 and 950 Mc

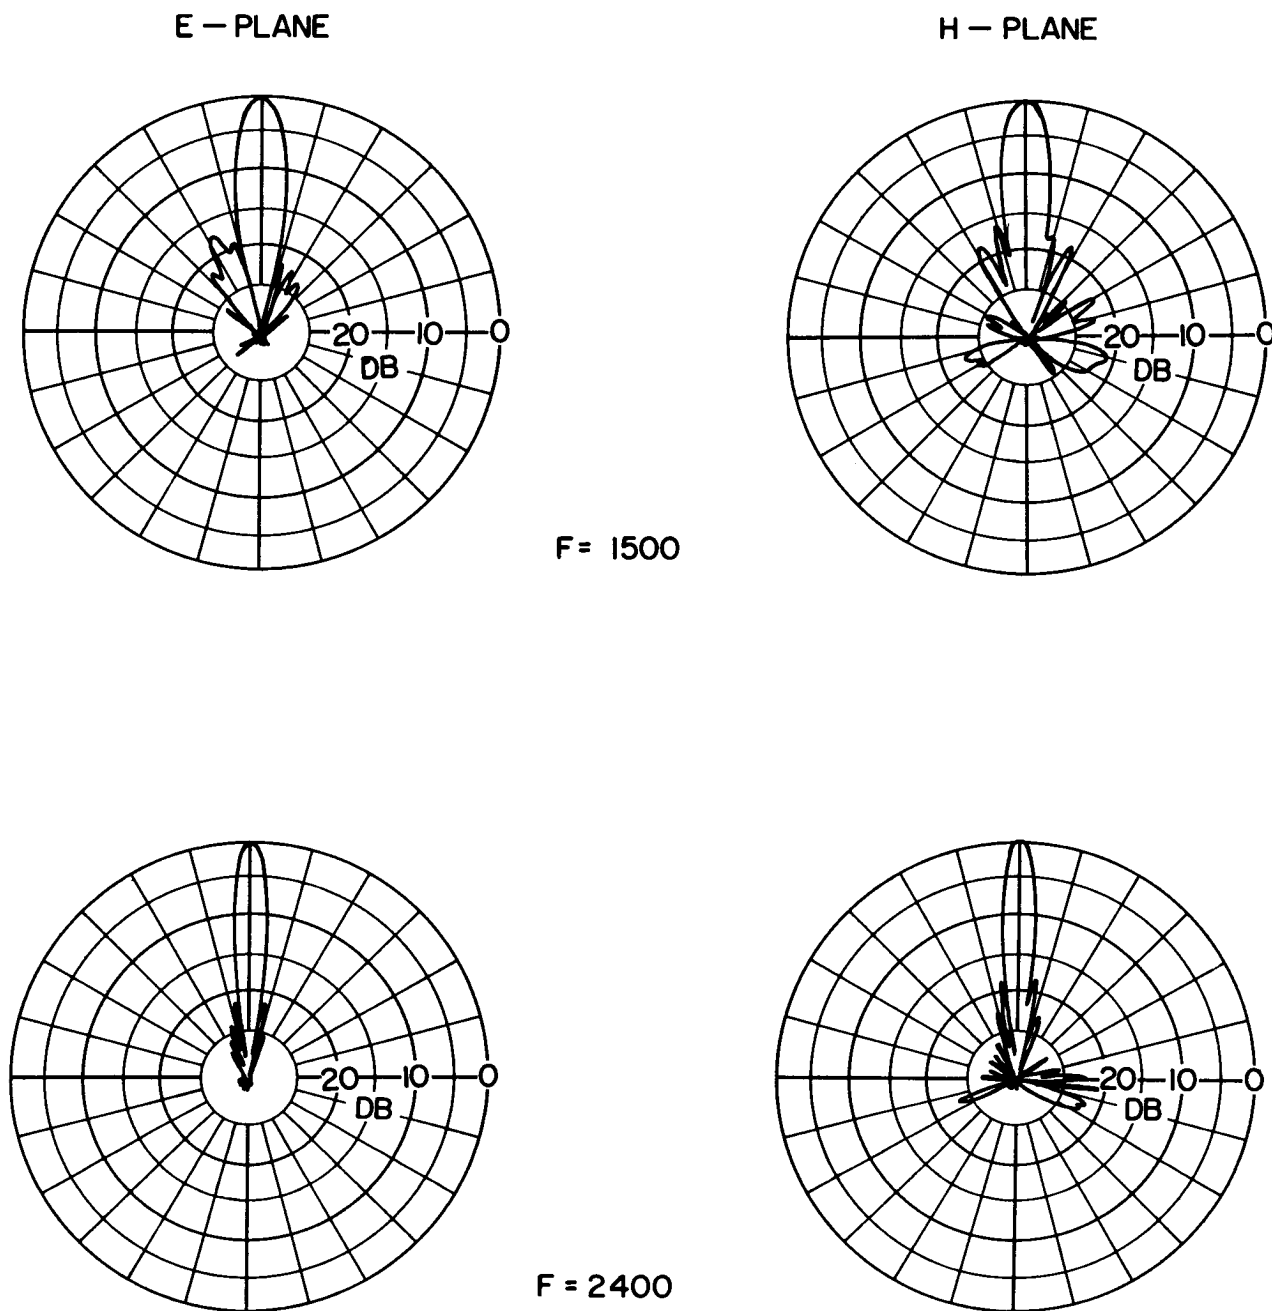


Figure 8. Radiation Patterns, 1500 and 2400 Mc

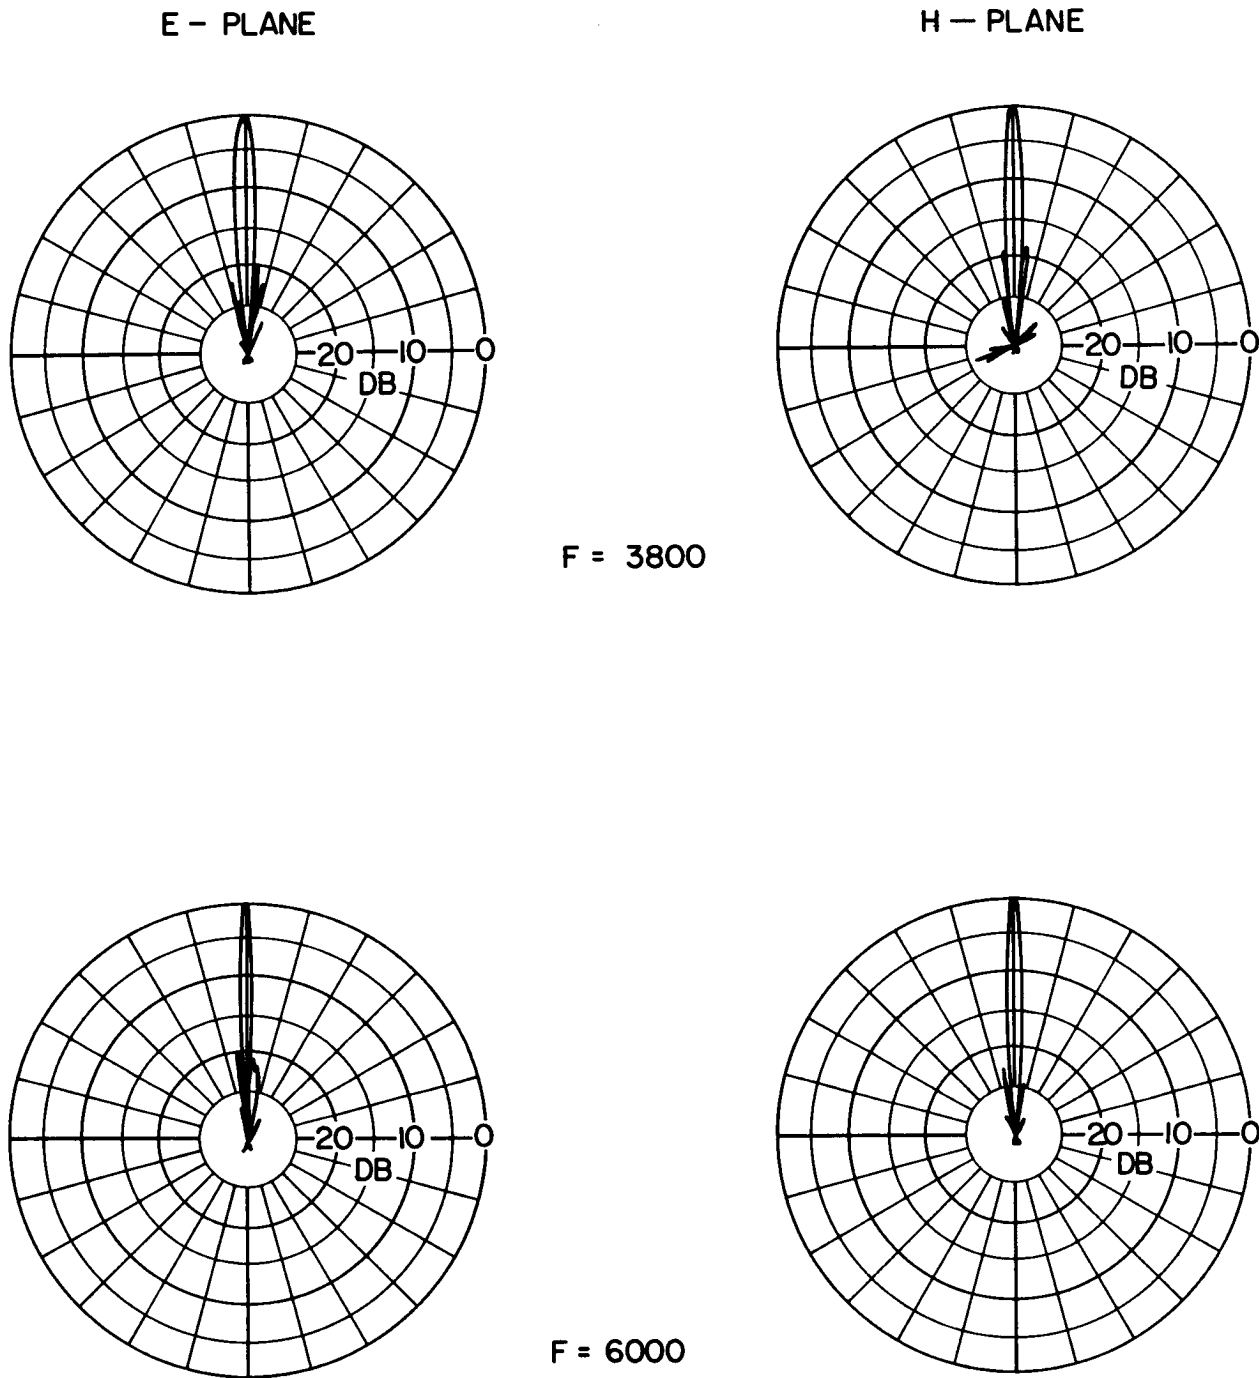


Figure 9. Radiation Patterns, 3800 and 6000 Mc

Receiving Dish Antenna
600 to 6000 Mc

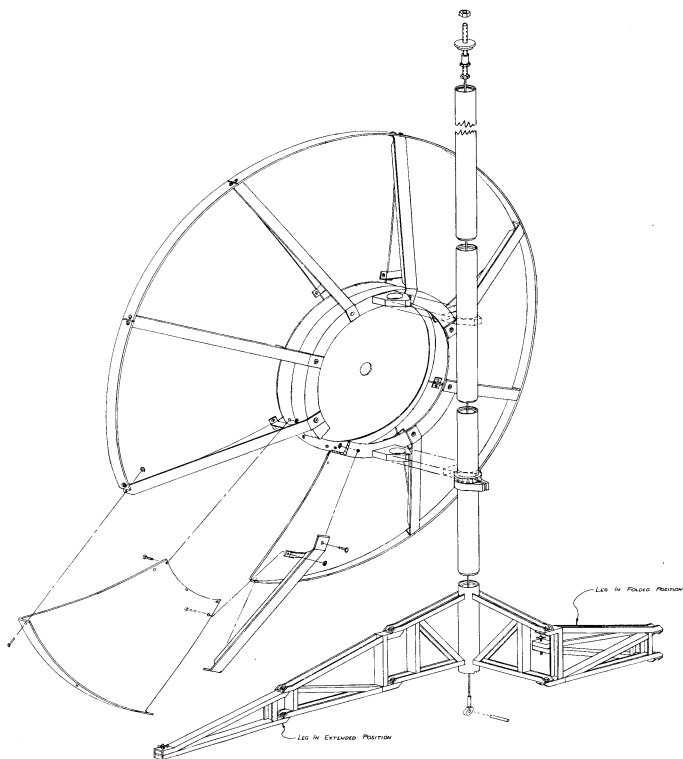


Figure 10. Exploded View

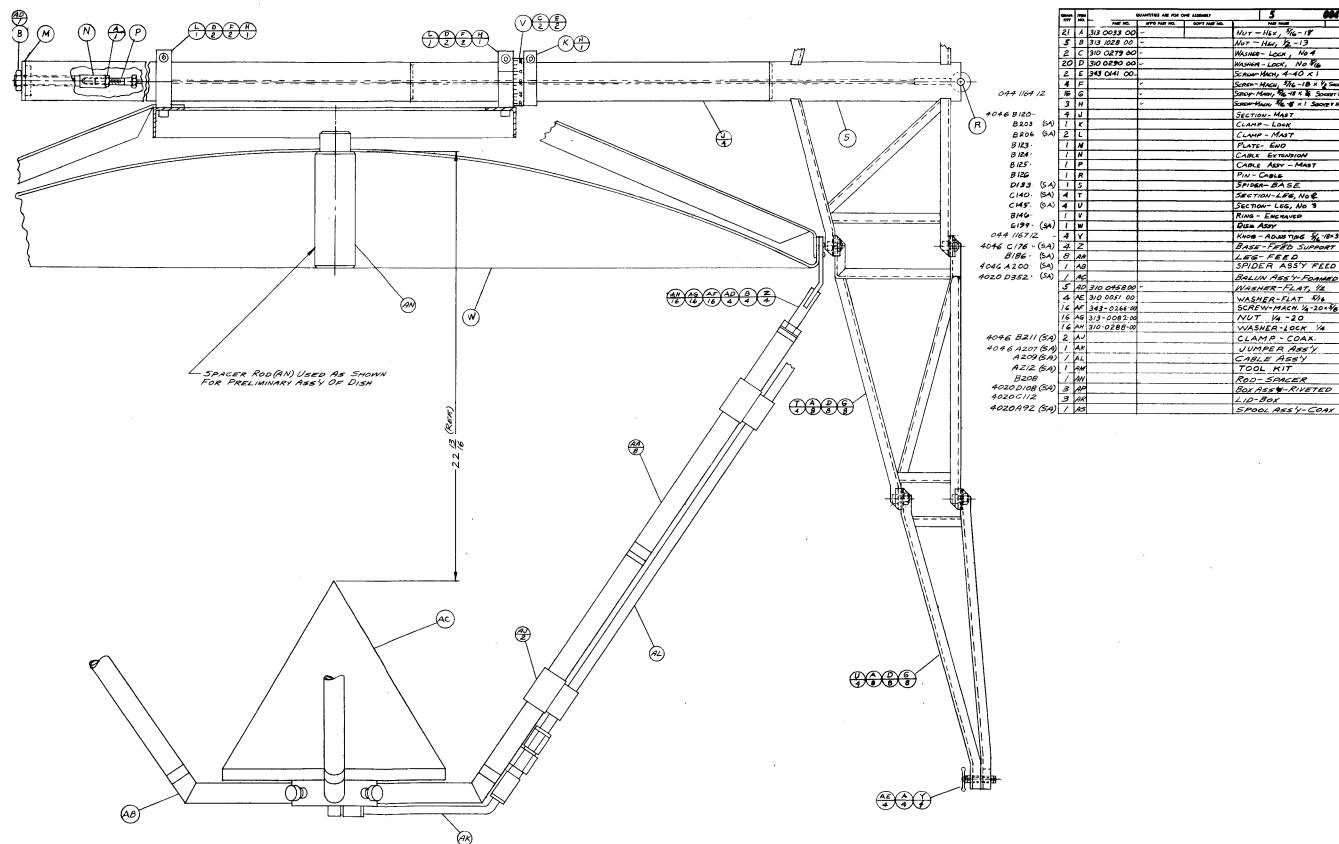
Receiving Dish Antenna
600 to 6000 Mc

Figure 11. Assembly Drawing

CER-941

LOG PERIODIC FEEDS FOR LENS AND REFLECTORS

R.H. DuHamel

F.R. Ore

1 April 1959

**This paper presented by the author at the
National IRE Convention March 1959**



COLLINS RADIO COMPANY

A PUBLICATION OF
THE RESEARCH AND DEVELOPMENT LABORATORIES
Department 30
© COLLINS RADIO COMPANY
1959
Cedar Rapids, Iowa

PROPRIETARY NOTICE: This report is the result of technical investigations made by the engineering staff of the Collins Radio Company. The disclosure of the information herein may pertain to proprietary rights, and the furnishing of this report does not constitute an expressed or implied license to use such material.

Printed in the United States of America

LOG PERIODIC FEEDS FOR LENS AND REFLECTORS

R. H. DuHamel and F. R. Ore
Collins Radio Company
Cedar Rapids, Iowa

Abstract

The application of unidirectional log periodic antennas as feeds for lens or reflectors to cover 10:1 or 20:1 bandwidths is described. Information on the primary patterns, phase center variation, input impedance, and aperture blocking of trapezoidal-tooth sheet structures is given so as to allow the design of feeds for a variety of lens and reflectors. Final results of pattern, gain and impedance measurements on a four-foot dish over the frequency range of 600 to 6000 mc are presented and a discussion of the slight sacrifice in gain to achieve this bandwidth is given.

Introduction

There are many applications in the communications, search, and ECM fields where it is quite desirable to have a high-gain antenna which will work over an extremely wide frequency range. Lens or reflector type antennas are often used, but their bandwidths have been limited by the primary feed. Ideally, the radiation pattern and input impedance of the primary radiator should be independent of frequency. The bandwidths of previous primary radiators have usually been on the order of 2 or 3:1. However, the recent discovery of log periodic^{1,2,3,4} and angular⁵ antennas with essentially frequency-independent operation over bandwidths of 10 or 20:1 provides the basis for new wide-band primary radiators.

This paper presents results of an investigation of the problems involved in the application of unidirectional log periodic feeds to reflector-type antennas. Sufficient information on the primary patterns, phase center, input impedance and aperture blocking of sheet trapezoidal-tooth log periodic structures is given to allow the antenna engineer to design feeds for a variety of lens and reflectors. Experimental results are given for a four-foot dish operating over the frequency range of 600 to 6000 mc.

Log Periodic Feed

Figure 1 is a sketch of a sheet trapezoidal-tooth log periodic antenna which will be considered in this paper as a feed. The angles α , β , and ψ define the extremities of the teeth, the tooth support section and the angle between the two half structures, respectively. The design ratio τ is defined as $\frac{R_{N+1}}{R_N}$. The ratio σ is set equal to $\sqrt{\tau}$. Since these antennas have been described previously, only a brief description of them will be given here.

The geometry of this type of structure is chosen so that the electrical properties must repeat periodically with the logarithm of the frequency. If the variation over one period is small, it is therefore small for all periods and the result is an extremely wide-band antenna. A period of frequency is defined by the range from τf to f . The antenna produces a

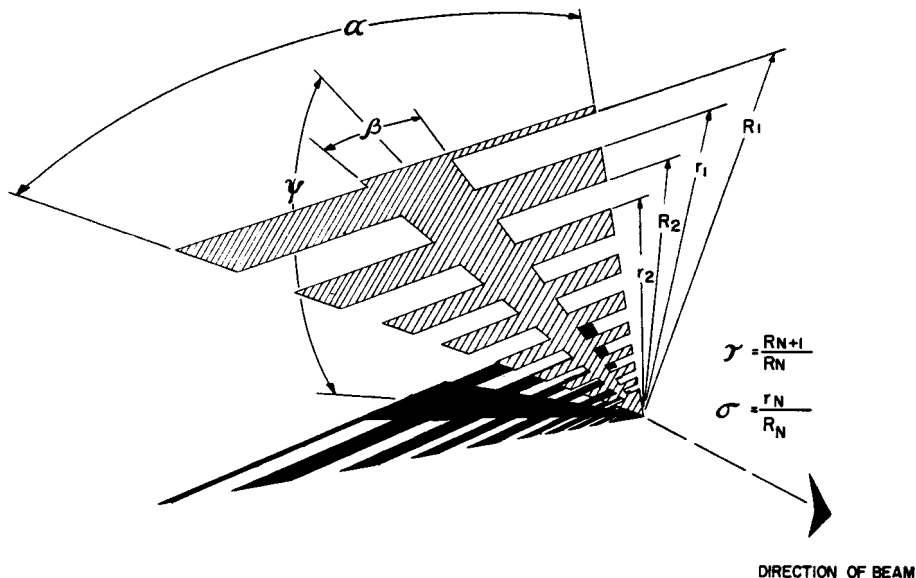


Figure 1. Trapezoidal-Tooth Log Periodic Structure

unidirectional, horizontally polarized beam pointing in the direction which the structure points. The two halves of the antenna are fed against each other either with a balanced line running between the two halves or an unbalanced line running along the center line of one half structure. The low-frequency cutoff occurs approximately when the longest tooth is $1/4$ wavelength long and the high-frequency cutoff occurs when the shortest tooth is somewhat less than $1/4$ wavelength long. The E- and H-plane patterns are the patterns in the xy and yz planes respectively. It is relatively easy to design these antennas to operate over 10:1 or greater bandwidths with essentially frequency-independent radiation patterns and input impedance.

General Feed Requirements

Obviously, for a very wide frequency range, the electrical characteristics of the feed should be essentially independent of frequency. The important electrical characteristics are the feed radiation pattern, input impedance, phase center, and the aperture blocking. The radiation patterns should be unidirectional and should have E-plane and H-plane beamwidths which give optimum gain for a given dish. These beamwidths will depend upon the shape of the dish, the F/D ratio and the desired illumination taper.

The requirements on the input impedance would depend upon the application, but in general, it may be said that the vswr should be at least less than 3:1. Of course, for radar applications, the vswr should be much less than this.

It is desirable that the feed look like a point source. Some feeds do not exhibit this property since the phase of the radiation pattern exhibits a complex behavior with radiation angle. The term point source

cone is used to define the cone of radiation over which the feed behaves as a point source. In the text, the term "phase center" will also be used to refer to the equivalent point source. It is desirable that the E-plane and H-plane phase centers coincide.

Aperture blocking due to the feed can lead to increased secondary pattern side lobes and beamwidths. For extreme bandwidth applications using log periodic feeds, this can become a serious problem since the feed is many times the required size at the high end of the frequency range.

The ability of log periodic feeds to satisfy these feed requirements will be discussed in the following paragraphs.

Pattern Characteristics

Figure 2 is a curve of the angle, δ , subtended by a parabolic reflector as a function of the F/D ratio. In order to obtain high gain and low side lobes with a dish antenna, it is desirable to taper the aperture illumination. The optimum amount of taper⁶ is a rather insensitive function of the F/D ratio with an average value of about 9 to 10 db. Thus, for most cases, figure 2 can be used directly to determine the desired 10-db beamwidth of a feed for a given F/D ratio.

Sample voltage patterns of a trapezoidal-tooth log periodic antenna are given in figure 3 over a 10:1

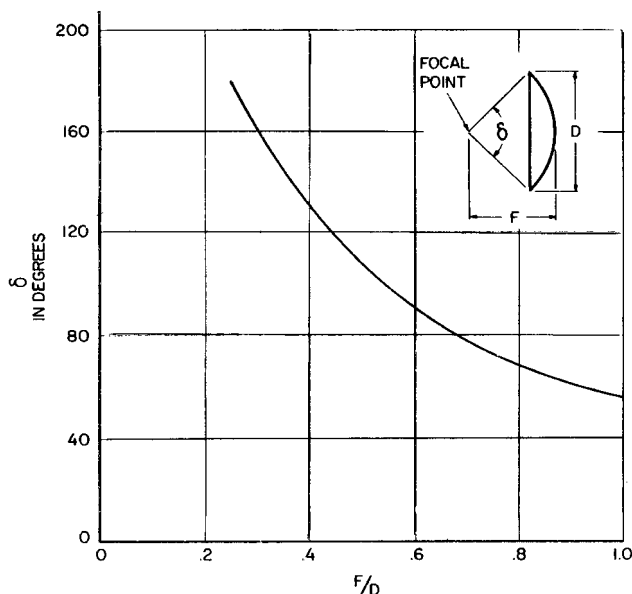


Figure 2. Plot of Angle δ Subtended by a Parabolic Reflector Vs the F/D Ratio

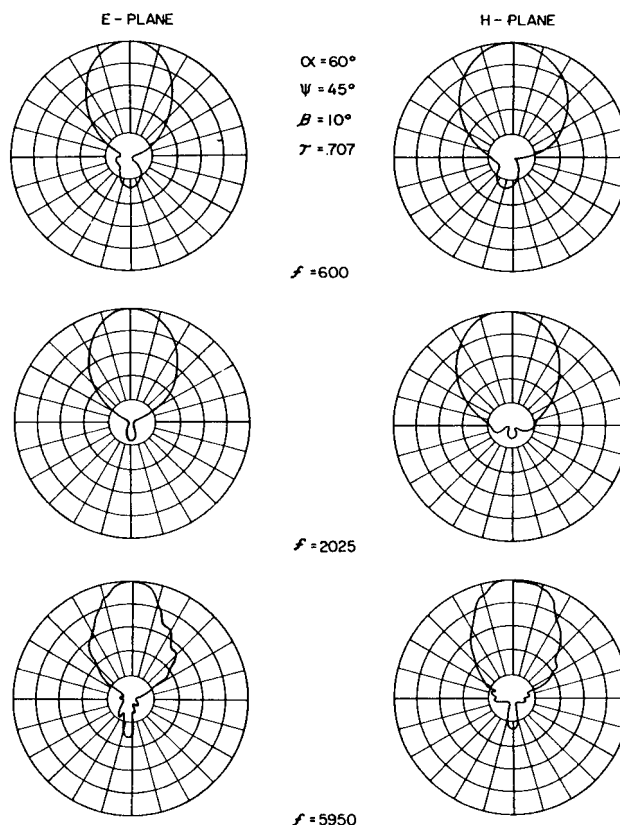


Figure 3. Patterns of a Logarithmically Periodic Feed Over a 10:1 Frequency Range

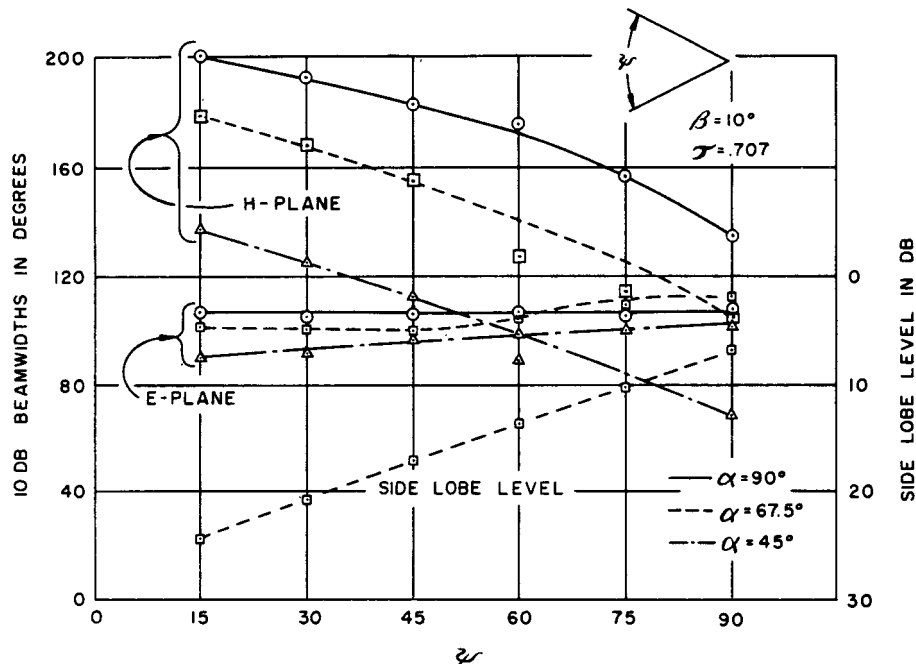


Figure 4. E- and H-Plane 10-dB Beamwidths and Side-Lobe Level as a Function of ψ

frequency range. These demonstrate the small variation of the beamwidths over the frequency range. The variation of the beamwidths is generally on the order of $\pm 8\%$.

The beamwidth and side-lobe level can be controlled to a considerable extent by the design parameters α , β , ψ and τ . Figure 4 shows the variation of the

E- and H-plane beamwidths and side-lobe level as a function of ψ for several values of α . For these curves, β and τ are held fixed at 10° and 0.707 , respectively. It will be noticed that the H-plane beamwidth decreases rapidly with increasing ψ and decreasing α . The side-lobe level, shown only for $\alpha = 67.5^\circ$, increases with increasing ψ . Figure 5 shows the variation of the E- and H-plane beamwidths as a function of α with ψ held fixed.

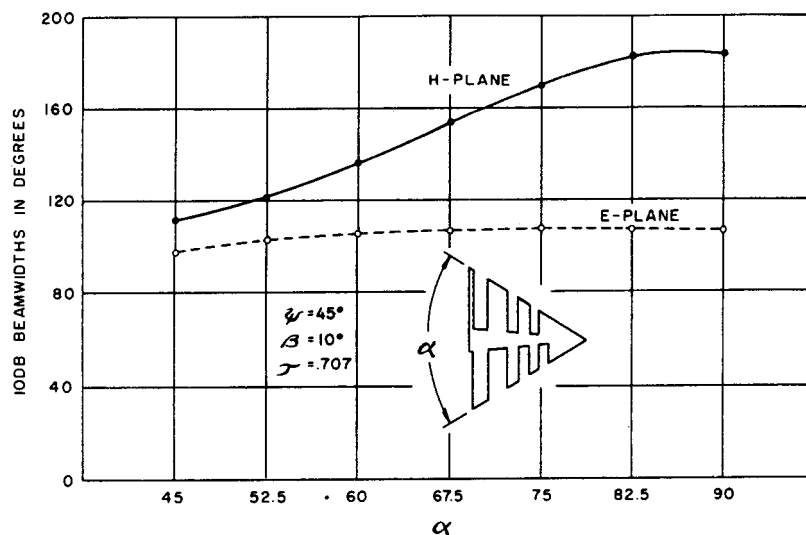
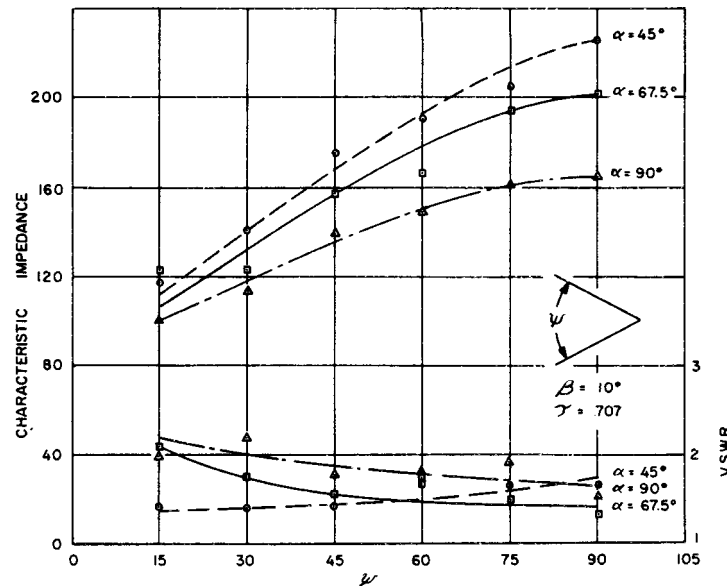


Figure 5. E- and H-Plane 10-dB Beamwidths as a Function of α

Figure 6. Characteristic Impedance as a Function of ψ

It will be noticed from these figures that the H-plane 10-db beamwidth can be easily controlled over the range of 70° to 200° by the parameters α and ψ . However, it is evident that the E-plane beamwidth is quite insensitive to these parameters since the variation is only from 90° to 110°. Although it has not been investigated thoroughly, some additional control of the E-plane beamwidth can be obtained with the parameters β and τ .

Because of their frequency independence, the pattern characteristics of this log periodic feed are ideally suited for feed applications with H-plane F/D ratios of 0.2 to 0.8 and E-plane F/D ratios of 0.45 to 0.65. For larger F/D ratios a multielement array of log periodic structures may be used.

Impedance Characteristics

If the input impedance of a log periodic antenna is plotted on a Smith Chart over a frequency range of several periods, it will be found that the locus forms a circle with the center lying on the zero reactance line. The characteristic impedance of the antenna is defined as the geometric mean of the maximum and minimum real values on the locus. The vswr referred to this characteristic impedance is then simply equal to the ratio of the maximum impedance to the characteristic impedance.

The variation of the characteristic impedance and vswr with the angles α and ψ is illustrated in figure 6. It will be noticed that the characteristic impedance decreases as ψ is decreased and α is increased. Except for very small values of ψ the vswr is less than 2:1. For the ψ values of most interest, the characteristic impedance ranges from approximately 100 to 200 ohms. Thus, it is necessary to use a wide-band technique to match this impedance to a coaxial or a balanced line. The tapered

line transformers^{7, 8} are ideally suited for matching this impedance over theoretically unlimited bandwidths.

When a matched feed is placed in front of a dish, part of the radiated energy will be reflected from the dish back into the feed. The magnitude of the reflection coefficient due to the dish reflection is given by $\frac{g\lambda}{4\pi F}$ where g is the feed gain along the axis of the dish. For a feed with optimum patterns for a dish with F/D = 0.5, this formula implies that D/λ should be greater than four in order to keep the reflection coefficient less than 1/3 (vswr less than two). Although this mismatch can be compensated for narrow band applications, no wide-band compensation methods are available. Thus, it is usually necessary to live with this additional mismatch for wide-band applications.

In general, free space vswr's ranging from 1.5 to 2.0 may be expected with a log periodic feed. When placed in front of a dish, the vswr will increase somewhat depending upon the focal length.

Phase Center

In general, the phase centers of a log periodic antenna do not lie at the vertex or feed point. Rather, they lie at a fixed electrical distance from the feed point. This distance, as measured in wavelengths, is approximately independent of frequency. This means that if the frequency is changed, the phase center of the feed will move relative to the feed point.

The effect of displacing the phase center from the focal point along the dish axis is a quadratic phase error in the dish aperture distribution. If Δ represents the displacement of the phase center from the focal point, then the phase difference of the aperture distribution between the center of the dish and the edge

of the dish is given approximately by $\frac{\Delta}{\lambda} (1 - \cos \frac{\delta}{2})$ where δ is the aperture angle of the dish. The maximum value of this phase difference should be less than approximately $\lambda/8$ which produces a reduction in dish gain⁶ of approximately 0.25 db. For $F/D = 0.5$, this maximum phase difference requires that the maximum displacement of the phase center from the focal point be less than $\lambda/3$. Thus, it is desirable to design the feed such that the phase center lies within $\lambda/3$ of the vertex if extreme bandwidths are to be achieved.

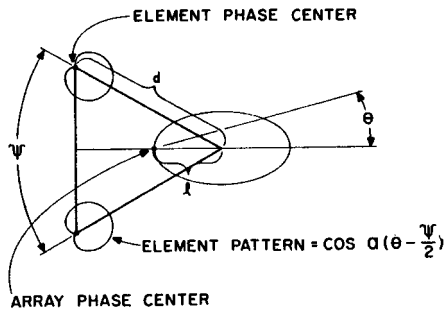


Figure 7. Co-ordinate System for the Derivation of H-Plane Phase Center

The movement of the phase center with the design parameters may be better understood by considering the following simplified theory. Figure 7 is a schematic diagram of the log periodic feed. The two lines separated by the angle ψ represent the center lines of the individual half structures. A basic characteristic of each of the half structures is that they produce a uni-directional pattern which points in the direction of the element, as sketched in the figure. The distance from the vertex of the half structure to the element E- or H-plane phase center is given by d . Both the E- and H-plane array phase centers will lie on the line bisecting the angle ψ and at a distance ℓ from the vertex. In general, neither the E- or H-plane element or array phase centers will coincide, i.e., d and ℓ will have different values for the E and H planes.

Consider first the array H-plane phase center. The H-plane pattern of the array is given by

$$E = e^{j(\beta\ell - \beta d \cos \frac{\psi}{2}) \cos \theta} \left\{ \cos \alpha \left(\theta + \frac{\psi}{2} \right) e^{j\beta d \sin \frac{\psi}{2} \sin \theta} + \cos \alpha \left(\theta - \frac{\psi}{2} \right) e^{-j\beta d \sin \frac{\psi}{2} \sin \theta} \right\} \quad (1)$$

where $\cos \alpha (\theta \pm \psi/2)$ represents the element pattern. The constant α is determined by

$$\alpha = \frac{\pi}{2\bar{\theta}} \quad (2)$$

where $\bar{\theta}$ is the half-power element beamwidth. A simple investigation of the phase variation for small angles of θ leads to the following formula for the distance of the array phase center from the antenna vertex.

$$\frac{\ell_H}{\lambda} = \frac{d_H}{\lambda} \left[\cos \frac{\psi}{2} - \frac{\pi}{\bar{\theta}} \sin \frac{\psi}{2} \tan \frac{\pi\psi}{4\bar{\theta}} \right] \quad (3)$$

It will be noticed that the array phase center always lies in front of the line joining the two element phase centers by an amount proportional to the second term of equation (3). It also can be seen that the proper choice of $\bar{\theta}$ and ψ will make the H-plane array phase center coincide with the vertex and that for $\psi = 180^\circ$, the phase center will not lie at the vertex as one might originally expect. This derivation neglects the effect of the presence of one half structure upon the current distribution and radiation pattern of the other half structure. Figure 8 is a comparison of the theoretical and measured values of the H-plane phase center as a function of ψ for three values of α . Notice that fairly good agreement is obtained for $\alpha = 45^\circ$ and 90° , but not for $\alpha = 67.5^\circ$.

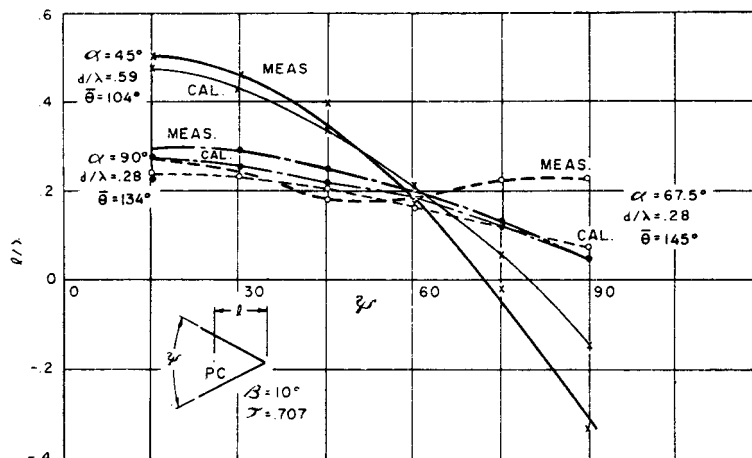


Figure 8. Comparison of Measured and Theoretical H-Plane Phase Center as a Function of ψ

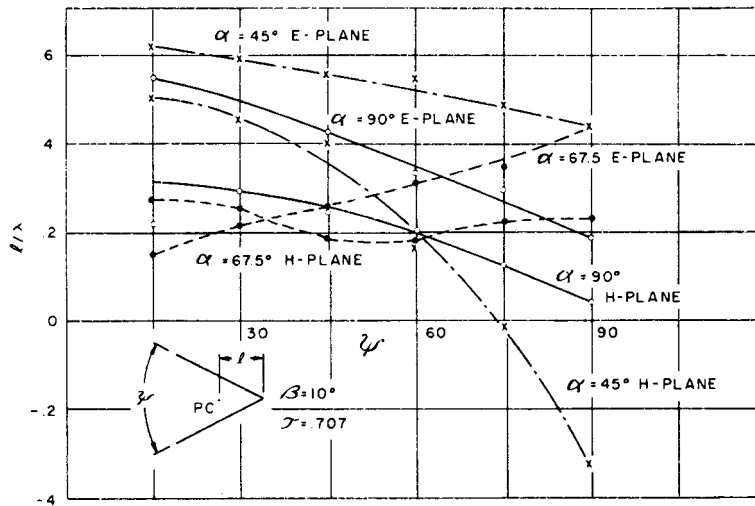


Figure 9. Variation of E and H-Plane Phase Centers with ψ

Consider next the E-plane array phase center. If the element E- and H-plane phase centers coincide, then the array phase center should lie at a point midway between the two element phase centers, which is at a distance from the vertex given by

$$\frac{l_E}{\lambda} = \frac{d_E}{\lambda} \cos \frac{\psi}{2} \quad (4)$$

If the element E- and H-plane phase centers do not coincide, then the array phase center will lie at some other point, which is a complex function of the element pattern and phase centers. Figure 9 shows the variation of both the E- and H-plane phase centers with the angle ψ for the same values of α as shown in figure 8. Again, the phase centers for $\alpha = 45^\circ$ and 90° move as expected, but for $\alpha = 67.5^\circ$ they move in a very peculiar fashion, especially the E-plane phase center.

The variation of the E- and H-plane phase centers with the angle α for ψ fixed at 45° is shown in figure 10. It will be noticed that the E-plane and H-plane phase centers do not coincide and that the results are again peculiar in that the curves do not decrease monotonically as α is increased.

Figure 11 shows the variation of the E-plane phase center with frequency over a half period. Although all of the structures exhibit some variation of phase center (as measured in wavelengths) with frequency, the results for $\alpha = 90^\circ$ are an extreme case. The information given in the previous figures is the average phase center location over a half period.

It is apparent that the phase center characteristics of log periodic antennas are not ideally suited for wide-band feed applications because the E- and H-plane phase centers do not coincide and the phase centers

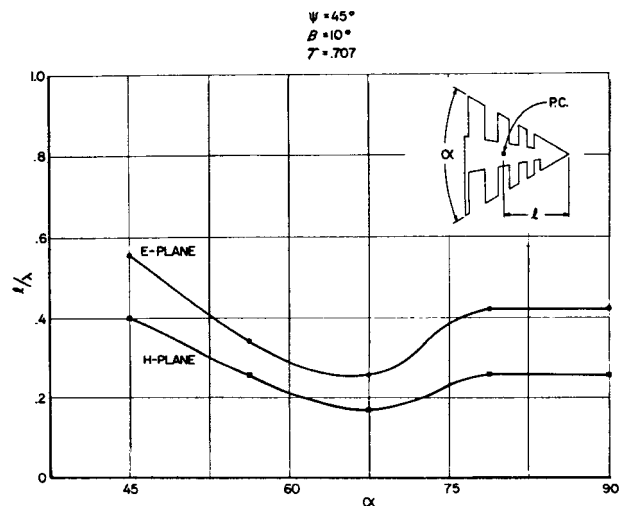


Figure 10. Variation of E and H-Plane Phase Center with α

move with frequency. However, the phase centers are well-defined, and point source cone half angles of 45° are easily achieved. Moreover, the distance of the phase center from the vertex can be made less than $\lambda/2$ which is satisfactory for most applications.

Feed For a Four-Foot Dish

The investigation of log periodic feeds was directed toward the development of a feed for a four-foot dish with $F/D = 0.5$ to cover the frequency range of 600 to 6000 mc. The final design parameters chosen are $\alpha = 60^\circ$, $\beta = 10^\circ$, $\psi = 45^\circ$, $\tau = 0.707$. The pattern characteristics of this feed are E- and H-plane average

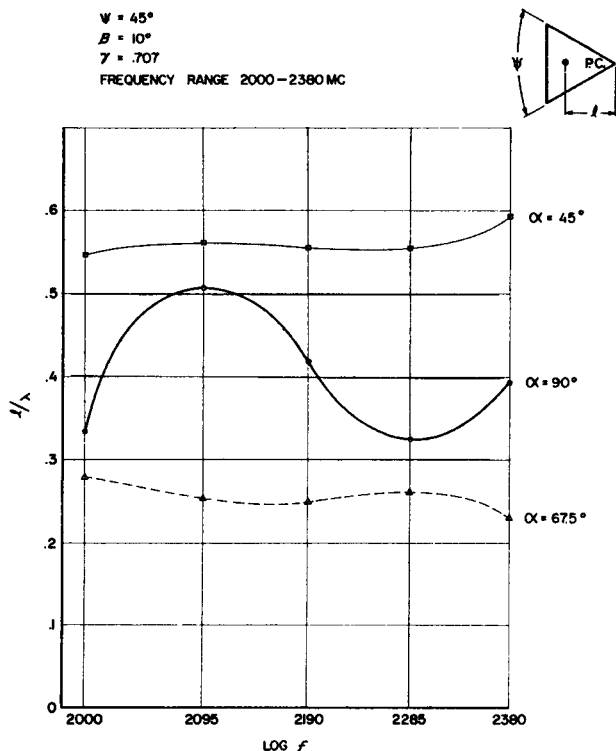


Figure 11. Variation of E-Plane Phase Center with Frequency Over a Half Period of Frequency

10-db beamwidths of 105° and 135° respectively, and an average side-lobe level in the order of 15 db. The patterns for this feed are shown in figure 3. It should be pointed out that the patterns for 600 and 5950 mc are near the low and high cutoff frequencies for the feed. Patterns over the major part of this frequency range are similar to those for 2025 mc. The distance to the E- and H-plane phase centers from the vertex are approximately 0.3 and 0.2 of a wavelength respectively. The desired 10-db beamwidth for the dish is about 105° (see figure 2). Thus, the H-plane beamwidths of the feed are much larger than desired. When this feed choice was made, it was thought that it would be better to accept less taper in the H plane in order to obtain a phase center as near the vertex as possible. Measurements have indicated that it probably would have been better to use a feed with $\alpha = 45^\circ$ and accept the larger phase center variation. Figure 12 is a picture of the four-foot dish with the log periodic feed. The tripod arrangement was constructed so that the location of the feed could be adjusted to determine the effects of phase center variation.

The variation of gain with feed placement is shown in figure 13 for six different frequencies over the frequency range of 600 to 6000 mc. The quantity Δ/F represents the relative displacement of the feed along the dish axis with the positive direction being toward the dish. The point 0 corresponds to placing the feed vertex at the focal point. For the various curves, the diameter of the dish in wavelengths is given. For the

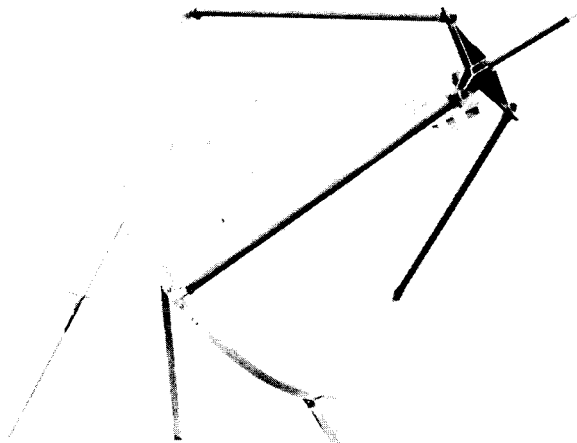


Figure 12. Four-Foot Dish with Log Periodic Feed

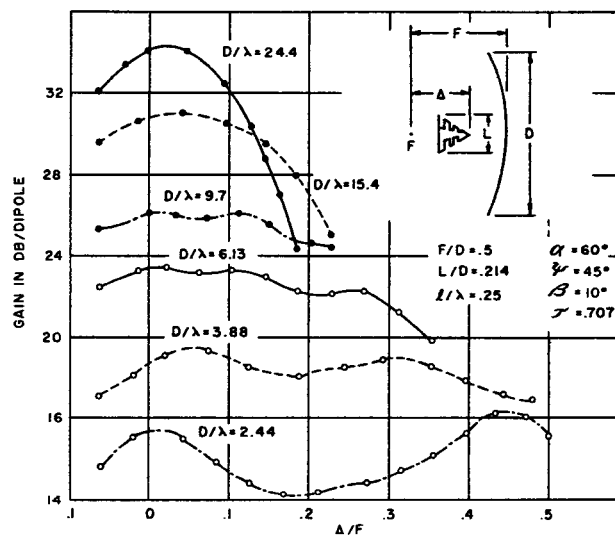


Figure 13. Reflector Gain as a Function of Feed Placement Over a 10:1 Frequency Range

lower curves, it is noticed that the gain varies in an approximate sinusoidal fashion due to the effect of the feed back lobe on the dish gain. It will be noticed that if Δ/F is set between 0 and 0.025 that the loss in gain due to variation of phase centers is less than 0.5 db over the complete frequency range. The final results to be given on the patterns and impedance are for the case of $\Delta/F = 0.025$.

Secondary Pattern Characteristics

Logarithmic plots of the secondary pattern for the four-foot dish are given in figure 14. Each radial division equals 5 db. At the lowest frequency, where the diameter of the dish is only 2.44 wavelengths, the

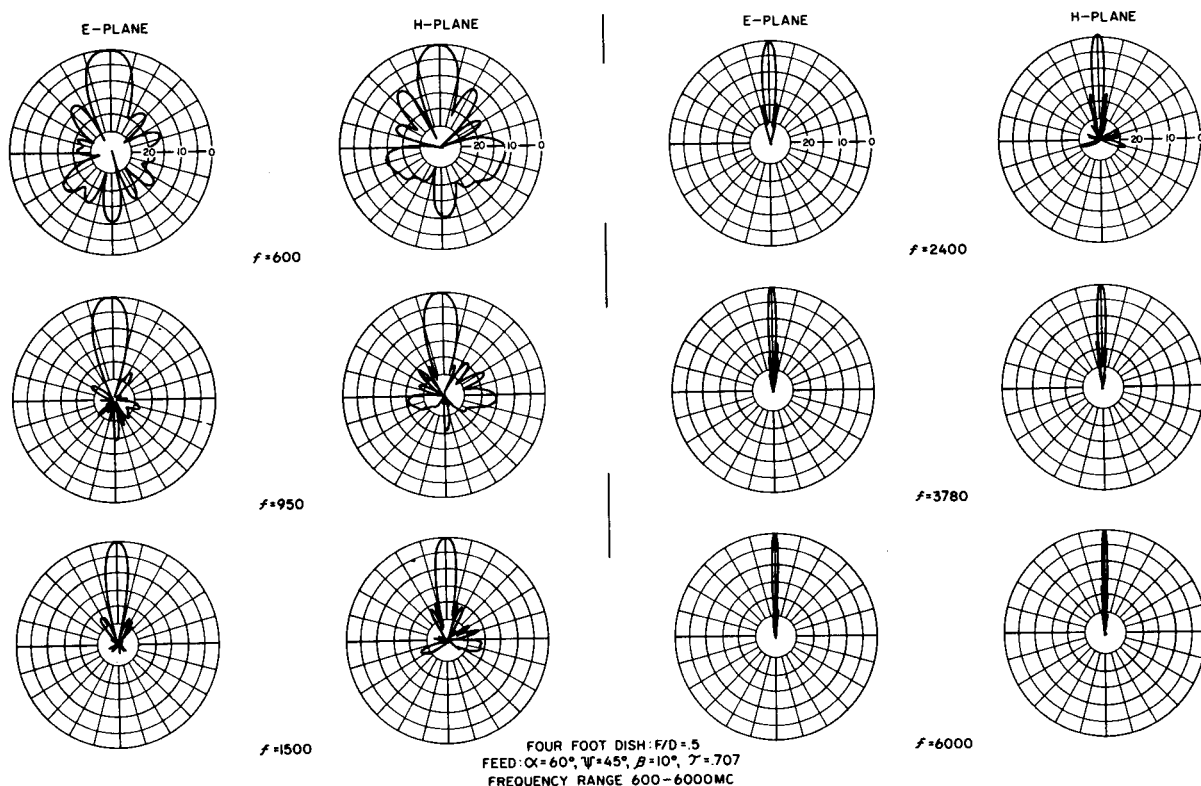


Figure 14. Patterns over a 10:1 Frequency Range

side lobes and back radiation are quite high, as would be expected. Figure 15 summarizes the gain, beamwidths, and side-lobe level for this dish. The product of the dish diameter in wavelengths times the half-power beamwidths in radians has an average value of

about 1.15 for the E plane and 1.09 for the H plane. This may be compared to the case for uniform circular aperture illumination for which this product is theoretically 1.02. The gain factor for the dish is on the order of 0.75.

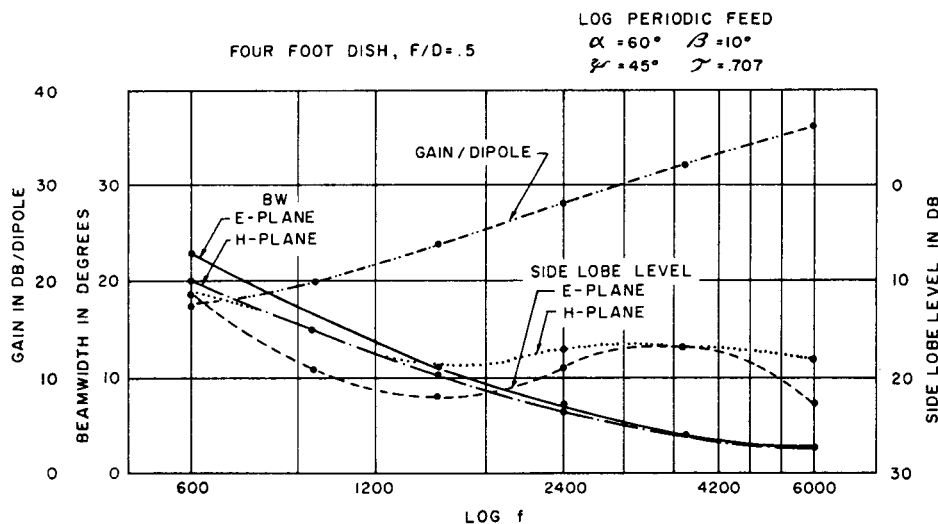


Figure 15. Gain/Dipole, Beamwidths and Side Lobe Level as A Function of Log f over a 10:1 Frequency Range

CONFIDENTIAL

It will be noticed that the H-plane side-lobe level is higher than the E-plane side-lobe level which is explained by the wider H-plane primary pattern beam-width. For frequencies about 2000 mc it would be expected that the E-plane side-lobe level should be 20 db or less. Possible causes for this discrepancy are aperture blocking, back radiation from the feed, and phase error in the aperture distribution.

Aperture Blocking

For operation over a 10:1 frequency range, the feed is ten times larger in size than is required at the high end of this range. Attempts were made to measure the total absorption and scattering cross section of the feed over this frequency range. The method used is described in reference 9. It was found that the measurements were quite difficult to perform accurately because of the supporting structure required to hold the feed in position. The measurements indicated roughly that the total scattering and absorption cross section was approximately equal to the physical cross section of the feed regardless of the frequency. Since the physical cross section of the feed is approximately 1/25 the area of the dish, the aperture blocking of the feed should not cause more than a 2 or 3 db increase in side-lobe level.

Primary Feed Construction

A close-up view of the sheet trapezoidal-tooth log periodic antenna and the feed cable is shown in figure 16. For an upper frequency limit of 6000 mc, it is quite difficult to bring in a coaxial line of appreciable size along one of the half structures without distorting the radiation patterns and input impedance at the high end of the frequency range. Consequently, the tapered line balun illustrated in figure 17 was used to feed the structure. Briefly, this consists of a coaxial line with the outer conductor gradually opening up in a prescribed theoretical manner and finally tapered to form a balanced line. Baluns of this type have been built to cover frequency ranges of 50:1 with the vswr less than 1.3. The impedance at the balanced end of this tapered line balun was adjusted to be 150 ohms for purposes of matching the antenna over a wide frequency range. Figure 18 shows the vswr at the input of a tapered line balun for the feed in free space and in front of the dish. The vswr is less than 2:1 over a large portion of the 10:1 frequency range and rises to 3:1 at only two points

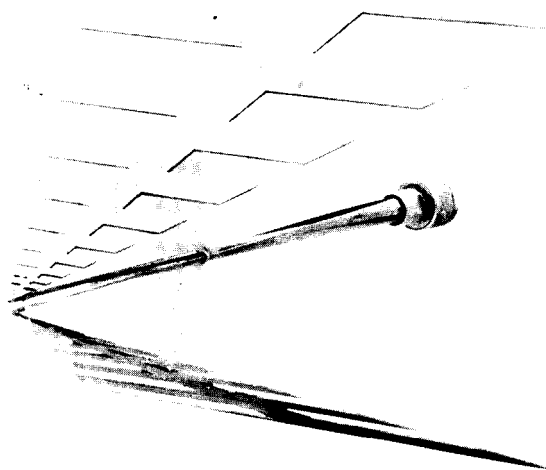


Figure 16. Log Periodic Feed with Tapered Line Balun

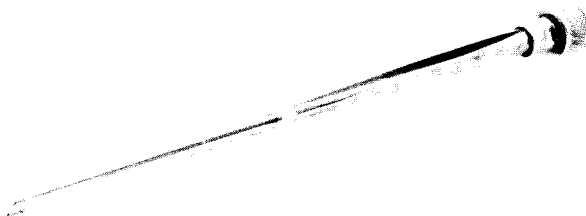


Figure 17. Tapered Line Balun

over this range. The high vswr in the frequency range near 800 mc is due to the reflections from the dish. At this frequency, the dish diameter is less than four wavelengths, which does not satisfy the condition established in a previous section. The vswr could possibly be improved considerably at the high end of this frequency range by taking more care in the design of the tapered line balun and front end of the feed.

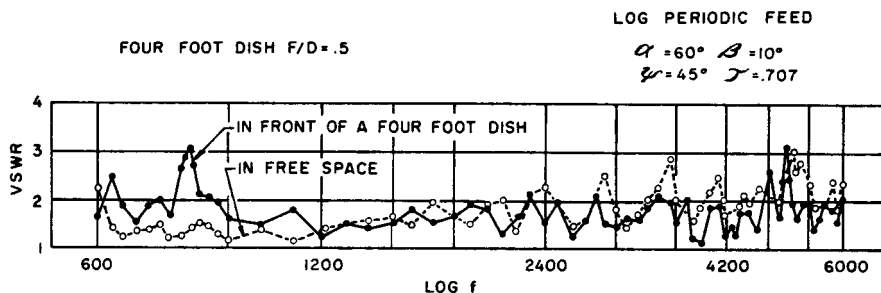


Figure 18. VSWR as a Function of Frequency Over a 10:1 Bandwidth

CONFIDENTIAL

Conclusions

Log periodic antennas are well suited as extreme bandwidth feeds for reflectors and lens. The impedance characteristics are satisfactory for applications which do not require v_{swr} 's less than 2:1. The movement of the phase center with frequency produces only a small degradation of the gain and side-lobe level. Independent control of the E- and H-plane beamwidths allows the design of feeds for a variety of reflector and lens shapes. The H-plane beamwidth for a feed consisting of two half structures may be varied over a wide range by changing the parameters α and ψ . Although the E-plane beamwidth is insensitive to these parameters, it may be decreased easily for large F/D ratios by using a multielement array.

Acknowledgement

It is a pleasure to acknowledge the assistance of Forrest G. Arnold in constructing and testing the antenna models.

Bibliography

1. R. H. DuHamel and D. E. Isbell, "Broadband Logarithmically Periodic Antenna Structures", 1957 IRE National Convention Record, Part I, pp. 119-128.
2. D. E. Isbell, "Non-Planar Logarithmically Periodic Antenna Structures", University of Illinois, Antenna Laboratory TR #30, February 20, 1958 Contract AF 33(616)-3220.
3. R. H. DuHamel and F. R. Ore, "Logarithmically Periodic Antenna Designs", 1958 IRE Convention Record, Part I, pp. 139-151.
4. R. H. DuHamel and D. G. Berry, "Logarithmically Periodic Antenna Arrays", 1958 IRE Wescon Convention Record, Part I, pp. 161-174.
5. V. H. Rumsey, "Frequency Independent Antennas", 1957 IRE National Convention Record, Part I, pp. 114-118.
6. S. Silver, "Microwave Antenna Theory and Design", Radiation Laboratory Series #12, McGraw-Hill, 1949.
7. S. B. Cohn, "Optimum Design of Stepped Transmission-Line Transformers", Trans. IRE, V. MTT-3, April 1955, p. 16.
8. R. W. Klopfenstein, "A Transmission Line Taper of Improved Design", Proc. IRE, V. 44, Jan. 1956, p. 31.
9. J. T. Bolljahn & W. S. Lucke, "Some Relationships between Total Scattered Power and the Scattered Field in the Shadow Zone", Trans. IRE, V. AP-4, January, 1956, pp. 69-71.